




BELT CONVEYOR LINE





In acciaio inox
En acier inoxydable
Aus edelstahl
In stainless steel
En acero inoxidable

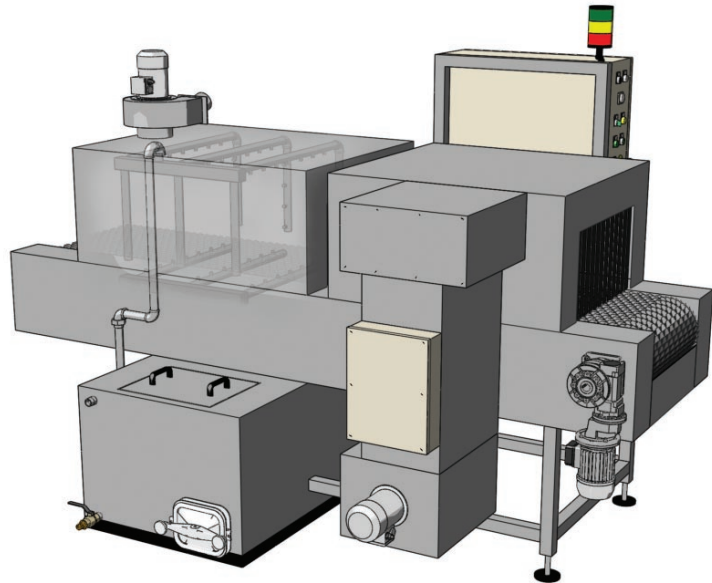


		G200
Larghezza utile nastro trasportatore ♦ Available width of conveyor belt Effektive Breite des Förderbands ♦ Largeur utilisable de la bande transporteuse ♦ Anchura banda transportador	mm	200
Altezza utile di lavaggio ♦ Usable washing height Nutzbare Waschhöhe ♦ Hauteur utile de lavage ♦ Altura util	mm	250
Carico ammissibile ♦ Real load ♦ Effektive Belastung ♦ Charge réelle ♦ Carga admisible	kg/m	50
Velocità nastro trasportatore ♦ Conveyor belt speed Geschwindigkeit des Förderbands ♦ Vitesse de la bande transporteuse ♦ Velocidad banda transportador	m/min	0,3-1,5
Altezza carico ♦ Loading height ♦ Lodehöhe ♦ Hauteur de chargement ♦ Altura de carga	mm	1000
Serbatoio lavaggio ♦ Wash tank ♦ Waschtank ♦ Reservoir lavage ♦ Capacidad tanque lavado	Lt	300
Serbatoio risciacquo ♦ Rinse tank ♦ Spültank ♦ Reservoir rinçage ♦ Capacidad tanque aclarado	Lt	-
Pompa lavaggio ♦ Wash pump ♦ Waschpumpe ♦ Pompe de lavage ♦ Bomba de lavado	Kw	2,2
Portata-prevalenza lavaggio ♦ Wash flow rate-pressure Leistung Waschen ♦ Débit-hauteur de charge lavage ♦ Caudal - presión bomba lavado	Lt/min bar	150 3,5
Pompa risciacquo ♦ Rinse pump ♦ Spülpumpe ♦ Pompe de rinçage ♦ Bomba aclarado	Kw	-
Portata-prevalenza risciacquo ♦ Rinse flow rate-pressure Leistung Förderhöhe Spülen ♦ Débit-hauteur de charge rinçage ♦ Caudal - presión bomba aclarado	Lt/min bar	-
Riscaldamento elettrico lavaggio ♦ Wash electrical heating Elektrische Heizung Waschen ♦ Chauffage électrique lavage ♦ Calentamiento eléctrico lavado	Kw	12
Riscaldamento elettrico risciacquo ♦ Rinse electrical heating Elektrische Heizung Spülen ♦ Chauffage électrique rinçage ♦ Calentamiento eléctrico aclarado	Kw	-
Temperatura bagno ♦ Solution temperature ♦ Wassertemperaturen ♦ Température du bain ♦ Temperatura tanques	°C	20-80
Aspiratore ♦ Exhauster ♦ Adsaugmotor ♦ Aspirateur ♦ Aspirador	Kw m³/h	0,18 300
Asciugatura elettrica ♦ Electric drying ♦ Elektrisches Trocknen Zubehör ♦ Séchage électrique ♦ Secado eléctrico	Kw	9
Ingombro larghezza ♦ Overall width ♦ Breite ♦ Largeur ♦ Ancho	mm	1600
Ingombro altezza ♦ Overall height ♦ Höhe ♦ Hauteur totale ♦ Altura	mm	1800
Ingombro profondità ♦ Overall depth with auxiliary bed Tiefe mit Arbeitsbelt ♦ Profondeur totale avec table de service ♦ Profundidad	mm	3000
Tensione d'alimentazione ♦ Power supply Anschlussspannung ♦ Tension d'alimentation ♦ Tension	Volt	230/400 +N



In acciaio inox
En acier inoxydable
Aus edelstahl
In stainless steel
En acero inoxidable

SILVER LINE

- ◆ Tunnel in acciaio inox per sgrassaggio e asciugatura
- ◆ Stainless steel belt conveyor for wash and dry
- ◆ Tunnel en acier inoxydable pour le lavage et séchage
- ◆ Tunnel aus Edelstahl für Reinigung und Trocknung
- ◆ Tunel en acero inox para el lavado y secado

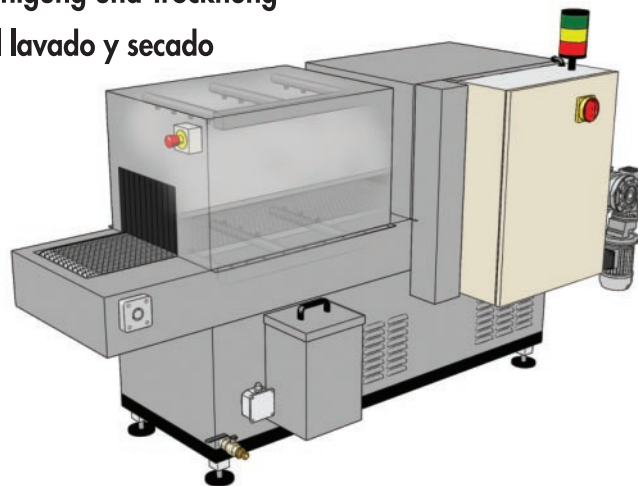

		S200	S300
Larghezza utile nastro trasportatore ♦ Available width of conveyor belt ♦ Effektive Breite des Förderbands ♦ Largeur utilisable de la bande transporteuse ♦ Anchura banda transportador	mm	200	300
Altezza utile di lavaggio ♦ Usable washing height Nutzbare Washhöhe ♦ Hauteur utile de lavage ♦ Altura util	mm	200	200
Carico ammissibile ♦ Real load ♦ Effektive Belastung ♦ Charge réelle ♦ Carga admisible	kg/m	50	50
Velocità nastro trasportatore ♦ Conveyor belt speed Geschwindigkeit des Förderbands ♦ Vitesse de la bande transporteuse ♦ Velocidad banda transportador	m/min	0,2-1	0,2-1
Altezza carico s Loading height ♦ Lodehöhe s Hauteur de chargement ♦ Altura de carga	mm	800	800
Serbatoio lavaggio ♦ Wash tank ♦ Waschtank s Reservoir lavage ♦ Capacidad tanque lavado	Lt	150	150
Pompa lavaggio ♦ Wash pump ♦ Waschpumpe ♦ Pompe de lavage ♦ Bomba de lavado	Kw	0,9	0,9
Portata-prevalenza lavaggio ♦ Wash flow rate-pressure Leistung Waschen ♦ Débit-hauteur de charge lavage ♦ Caudal - presión bomba lavado	Lt/min bar	100 2,5	100 2,5
Riscaldamento elettrico lavaggio ♦ Wash electrical heating Elektrische Heizung Waschen ♦ Chauffage électrique lavage ♦ Calentamiento eléctrico lavado	Kw	6	6
Temperatura bagno ♦ Solution temperature Wassertemperaturen ♦ Température du bain ♦ Temperatura tanques	°C	20-50	20-50
Asciugatura elettrica ♦ Electric drying Elektrisches Trocknen Zubehör ♦ Séchage électrique ♦ Secado eléctrico	Kw	6	6
Ingombro larghezza ♦ Overall width ♦ Breite ♦ Largeur ♦ Ancho	mm	1100	1100
Ingombro altezza ♦ Overall height ♦ Höhe ♦ Hauteur totale ♦ Altura	mm	1300	1300
Ingombro profondità ♦ Overall depth with auxiliary bed Tiefe mit Arbeitsbelt ♦ Profondeur totale avec table de service ♦ Profundidad	mm	2500	2500
Tensione d'alimentazione ♦ Power supply ♦ Anschlussspannung ♦ Tension d'alimentation ♦ Tension	Volt	230/400 +N	230/400 +N

La società si riserva di apportare modifiche in qualsiasi momento - *Nous reservons les droits de modifications* - Technische Änderungen vorbehalten - *We reserve the right to modify without notice* - Nuestra empresa se reserva el derecho de realizar modificaciones en cualquier momento.



CleanMek SRL
SURFACE TREATMENT MACHINES

Via Lombardia, 1D - 40060 Osteria Grande (BO) - Italy - Tel. ++39 051 6958390 - Fax ++39 051 946358
info@cleanmek.com - www.cleanmek.com